


Enquiry Checklist For Cantilever Racking

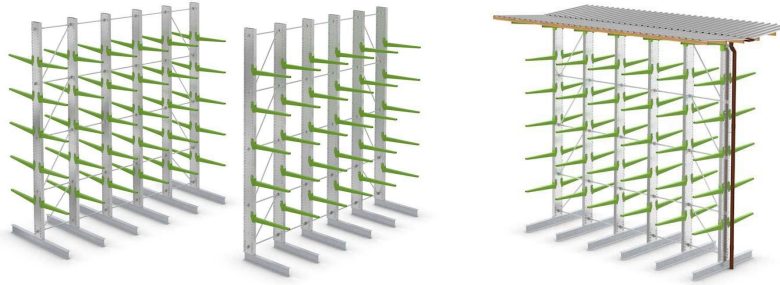

Customer information:	
Customer-/Project name:	
Street address:	
Postcode:	
City:	
Country:	

Project Specification:

Total No. of Racks	Single or Double Sided	No. of Uprights in Rack Length	C/C Distance of Uprights: 4100mm 4400mm 4800mm 5200mm 5600mm 6000mm 6300mm	Indoor or Outdoor Use	Arm Length: 800mm (660kg) 1000mm (850kg) 1250mm (800kg) 1250mm (1000kg) 1500mm (600kg)	No. of Levels Side 1 (including base level)	No. of Levels Side 2 (including base level)	Cantilever Roof Arms 1800mm Required? Yes/No	Steel Shelf Gratings Required? Yes/No	Type of Materials to be Stored: Timber (heavy) Timber (light) Steel, Plastics, Other	Optional 36mm Socket & Spanner Set Required? Yes/No	Optional Installation Support Stabiliser Required? Yes/No	Additional Floor Levelling Shims Required? Packs of 10 x 2mm Yes/No

Date: _____ Name: _____

ADDITIONAL REQUIREMENTS:

UPRIGHT HEIGHTS:




4100mm
4400mm
4800mm
5200mm
5600mm
6000mm
6300mm

UPRIGHT CENTRES:




1000mm
1200mm
1500mm

ARM LENGTHS:



800mm (660kg)
1000mm (850kg)
1250mm (800kg)
1250mm (1000kg)
1500mm (600kg)


ROOF ARMS 1800mm LONG:

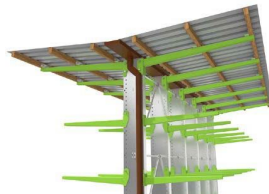

ROOF ARM PURLIN ANGLES:



STEEL SHELF GRATINGS:

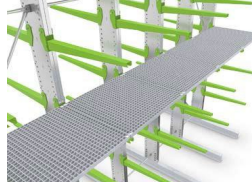

OPTIONAL COMPONENTS:

36mm Socket & Spanner Set:



Installation Support Stabiliser:



Floor Levelling Shims:
Included as standard with each upright
2 x 2mm + 2 x 3mm
Additional Packs of 10 x 2mm can be ordered.